
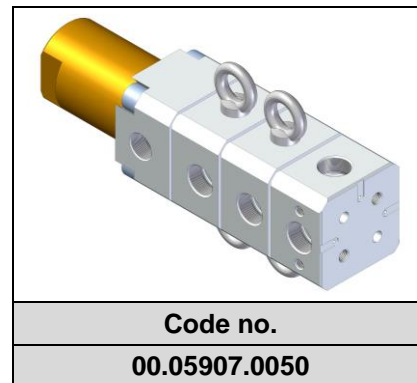
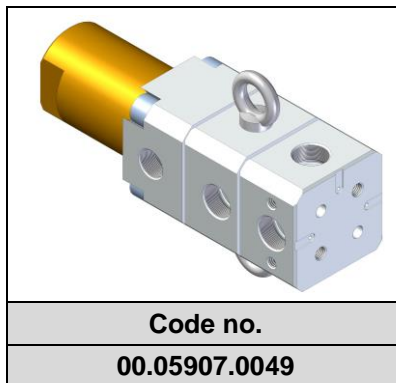


BYPASS VALVES UP TO 4500 BAR

08.K.2 – 09/18

Bypass valve

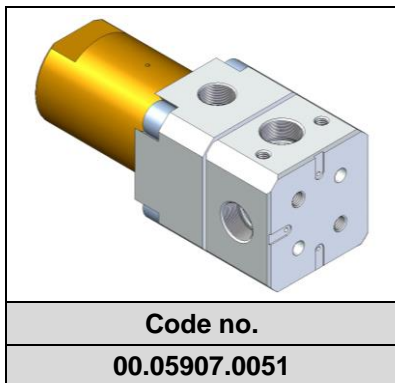

Oil controlled 2/2 way bypass valve to switch over to de-pressurised circulation.

max. operating pressure	max. flow rate	max. control pressure	Overflow connection	High pressure connection	Code no.
3200 bar	50 l/min.	120 bar	G 3/4"	3 x M 30 x 2 (i)	00.05907.0051
3200 bar	100 l/min.		2 x G 3/4"	5 x M 30 x 2 (i)	00.05907.0049
3200 bar	100 l/min.		2 x G 3/4"	7 x M 30 x 2 (i)	00.05907.0050
Overflow line to the tank, G 3/4" connection					00.02515.0229
Overflow line to the tank, G 3/4" connection, stainless steel					00.02515.0258
Overflow line to the tank, G 1" connection, in combination with a conversion kit and a standard pressure regulating valve					00.02515.0285
Doppelnippel - G 3/4" / G 1" connecton					04.02981.0038

NOTE

Connection fittings between pressure regulating valve and pump head
⇒ see chapter 8. H.

HAMMELMANN®