


PIPE CLEANING NOZZLES - SELF SPINNING


1500 BAR, POLISHER

Nozzle Ø [mm]	Connection thread female	Tube Ø [mm]		Nozzles	Output at 1500 bar (incl. leakage) [l/min]		Code no.
		min.	max.				
12	M 7	15	30	2 x Ø 0,90 radial	approx. 30	c	00.00788.0008
14	G 1/8"	17	35	2 x Ø 1,00 radial	approx. 38	c	00.00788.0009
18	G 1/4"	20	40	2 x Ø 1,10 radial	approx. 45	c	00.00788.0010
22	G 1/4"	25	50	2 x Ø 1,00 radial	approx. 50	a, b	00.00788.0011
28	G 1/4"	33	60	2 x Ø 1,10 radial	approx. 62	a, b	00.00788.0012

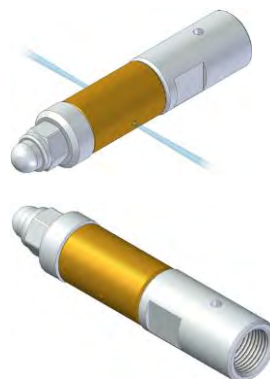


1500 BAR, WITH FRONT CUTTING NOZZLES

Nozzle Ø [mm]	Connection thread female	Tube Ø [mm]		Nozzles	Output at 1500 bar (incl. leakage) [l/min]		Code no.
		min.	max.				
18	G 1/4"	20	40	2 x Ø 0,60 axial	approx. 40	a, c	00.00788.0006
				2 x Ø 0,60 radial			
22	G 1/4"	25	50	2 x Ø 0,60 axial	approx. 40	a, c	00.00788.0007
				2 x Ø 0,60 radial			

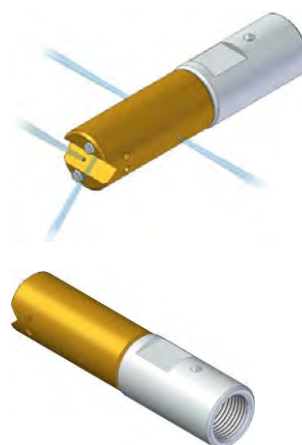

2500 BAR, POLISHER

Nozzle Ø [mm]	Connection thread with sealing cone female	Tube Ø [mm]		Nozzles	Output at 2500 bar (incl. leakage) [l/min]		Code no.
		min.	max.				
15	3/8"-24 UNF LH	18	35	2 x Ø 0,60 radial	approx. 25	a, b	00.00788.0013
16	3/8"-24 UNF LH	19	35	2 x Ø 0,60 radial	approx. 25	a, b	00.00788.0014
18	3/8"-24 UNF LH	20	40	2 x Ø 0,70 radial	approx. 32	a, b	00.00788.0015
20	M 14 x 1,5 LH	23	45	2 x Ø 0,70 radial	approx. 32	a, b	00.00788.0016

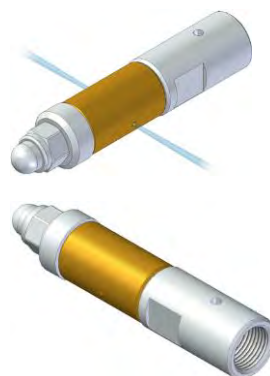

a) with nozzle inserts b) bronze rotor c) stainless steel rotor