

# VACUUM UNIT - 200

13.K.1 – 11/2019

## HAMMELMANN VACUUM UNIT-200

for operation with the HAMMELMANN AQUABLAST® Plus and the hand held AQUABLAST®.

### Consisting of:

- Manually deployed waste collection unit.
- Waste water and solids are separated within the system for further disposal.
- The pre-cleaned waste water is pumped out of the unit so that downtime is minimised.
- Separator collects materials in suspension.
- Hinged doors to allow solids removal.
- Power connection via heavy duty plug with phase inverter.
- De-watering pump with over suction protection.
- Sight glasses for monitoring content level.
- Lockable casters.
- High mobility with forklift shoes and lifting eyes.



### Technical data

Length:	approx.	1970 mm
Width:	approx.	970 mm
Height:	approx.	1800 mm
Weight:	approx.	670 kg


Tank capacity:	2 x 230 l
----------------	-----------

Power required:	5,5 kW
Vacuum:	200 mbar
Suction volume:	200 m <sup>3</sup> /h

Connections	
Water out:	1" GEKA coupling
Suction in:	B coupling

Centrifugal pump:	04.03226.0800
Vacuum pump:	04.03239.0003

\* The integral safety valve prevents too great a vacuum and thus the overheating of the vacuum pump.

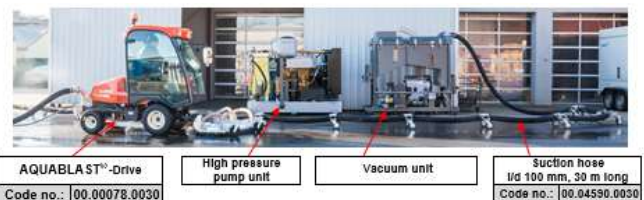

	<b>Code no.</b>
<b>Vacuum unit</b>	<b>00.05480.0010</b>

### Accessories

Description	Code no.
Suction hose 50 mm i/d (standard), 15 m	<b>00.04590.0005</b>
Suction hose 65 mm i/d (extension), 10 m	<b>00.04590.0006</b>

**HAMMELMANN®**