


Description:

- Synthetic rubber inner tube.
- Steel wire braid reinforcement.
- Wear and weather resistant rubber cover.
- Temperature range:
- 40° to + 100°C

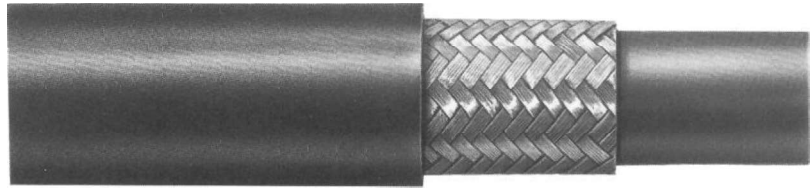

Nominal diameter i/d [mm]	Perm. operating pressure [bar]	Connection	Hose diameter o/d [mm]	Minimal bend radius [mm]	Hose length [m]	Weight [kg]	Code no.
		Spanner A/F Torque					
10	290	M18 x 1.5 DKL	17.4	130	2.0	0.7	04.04598.0213
					4.0	1.4	04.04598.0214
					6.0	2.0	04.04598.0215
		22 mm			10.0	3.4	04.04598.0216
					15.0	5.1	04.04598.0217
					20.0	6.8	04.04598.0218
					40.0	13.6	04.04598.0219
12	250	M22 x 1.5 DKL	20.6	180	2.0	0.9	04.04599.0213
					4.0	1.8	04.04599.0214
					6.0	2.7	04.04599.0215
		27 mm			10.0	4.5	04.04599.0216
					15.0	6.8	04.04599.0217
					20.0	9.0	04.04599.0218
					40.0	18.0	04.04599.0219
20	170	M30 x 1.5 DKM	27.7	240	2.0	1.3	04.04602.0213
					4.0	2.6	04.04602.0214
					6.0	3.8	04.04602.0215
		36 mm			10.0	6.4	04.04602.0216
					15.0	9.6	04.04602.0217
					20.0	12.8	04.04602.0218
					40.0	25.6	04.04602.0219
25	140	M38 x 1.5 DKM	35.6	300	2.0	1.9	04.04603.0213
					4.0	3.9	04.04603.0214
					6.0	5.8	04.04603.0215
		46 mm			10.0	9.7	04.04603.0216
					15.0	14.5	04.04603.0217
					20.0	19.4	04.04603.0218
					40.0	38.8	04.04603.0219
		105 Nm					

NOTE!

Burst pressure = 2.5 x permissible operating pressure
 Test pressure = 1.5 x permissible operating pressure

NOTE!

Other hose lengths available upon request.