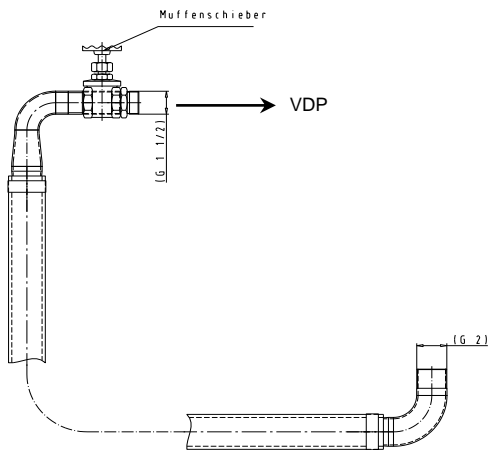
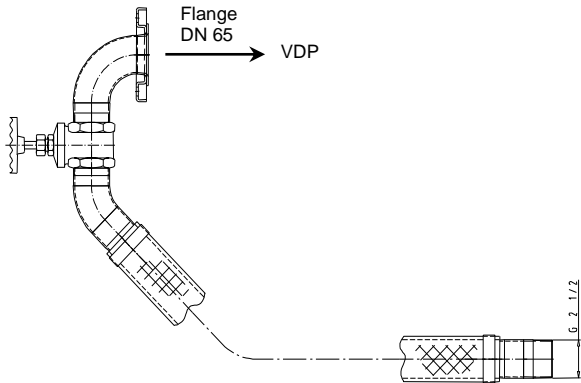
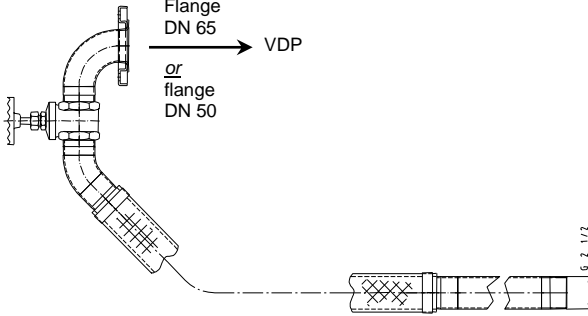
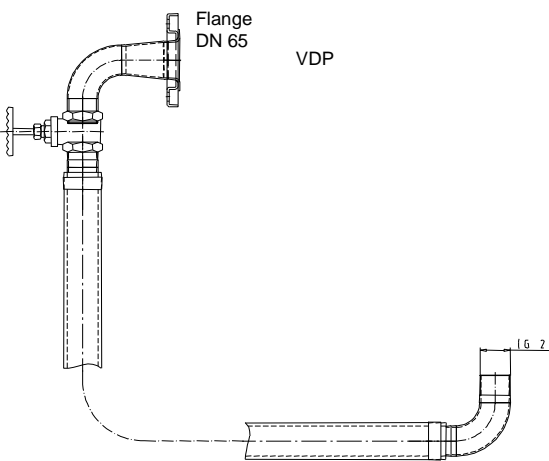


# SUCTION SIDE FITTINGS

## CONNECTION LINE BETWEEN TANK AND BOOST PUMP

### - STANDARD -



<p>up to 60 l/min., for diesel driven units</p> 	<p>from 60 l/min., for diesel driven units</p> 
<p>Connection boost pump / tank 415 l (e. g. for assembly in containers)</p>	<p>Connection boost pump / tank 1350 l (e. g. for assembly in track)</p>
<p><b>Code no.</b> <b>00.02515.0237</b></p>	<p><b>Code no.</b> <b>00.02515.0242</b></p>


<p>from/up to 60 l/min., for diesel driven units</p> 	<p>60 – 150 l/min., for diesel driven units</p> 
<p>Connection boost pump / tank 1350 l (e. g. for assembly in 20' container)</p>	<p>Connection boost pump / tank 415 l (e. g. for assembly in containers)</p>
<p><b>for flange</b> <b>DN 65</b> (from 60 l/min.) <b>DN 50</b> (up to 60 l/min.)</p>	<p><b>Code no.</b> <b>00.02515.0243</b> <b>00.02515.0167</b></p>
	<p><b>Code no.</b> <b>00.02515.0241</b></p>

# SUCTION SIDE FITTINGS

11.G.2 – 10/13

## CONNECTION LINE BETWEEN TANK AND BOOST PUMP - STANDARD -

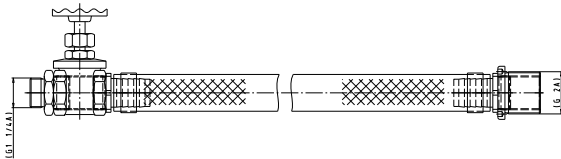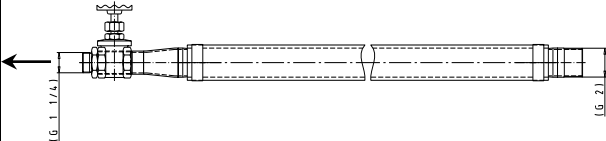up to 50 l/min., for electric driven units	50 – 100 l/min., for electric driven units
	
Connection boost pump / tank 415 l (e. g. for assembly on base frame)	Connection boost pump / tank 415 l (e. g. for assembly on base frame)
<b>Code no.</b> <b>00.02515.0270</b>	<b>Code no.</b> <b>00.02515.0219</b> or <b>00.02515.0261</b> (stainless steel for demin.-water)

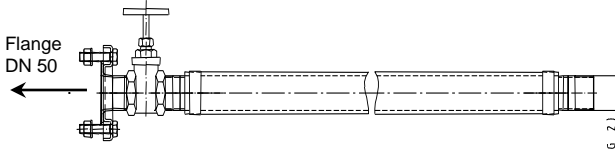100 – 200 l/min., for electric driven units

Connection boost pump / tank 415 l (e. g. for assembly on base frame)
<b>Code no.</b> <b>00.02515.0238</b>

**HAMMELMANN®**