

SUCTION SIDE CONNECTION FITTINGS WITH FILTER - SPECIAL FILTER


11.D.7 – 09/18

Dirt filtration plant

ZEOLITH-Filter Type GFK-Z-16

Single unit with manual backwashing to remove undissolved dirt particles.
Used as a pre-filter for water tanks, for ex. container installation.

- Performance: max. 4 m³/h
- Grade of filtration: approx. 5 µm
- Size of filter housing: Ø 410 mm
- Total height: 1800 mm
- Pressure range: PN 6 bar
- Operating temperature: approx. 15 °C
- Filling of filter housing: 165 kg special filter, 10 kg quartz gravel supporting layer
- Piping (stainless steel): 4 x ball valve R 1 ¼" nickel-plated for operation and backwash
- Filter substrate: Zeolite (leaf-shaped crystals)
- Weight of the unit: 170 kg

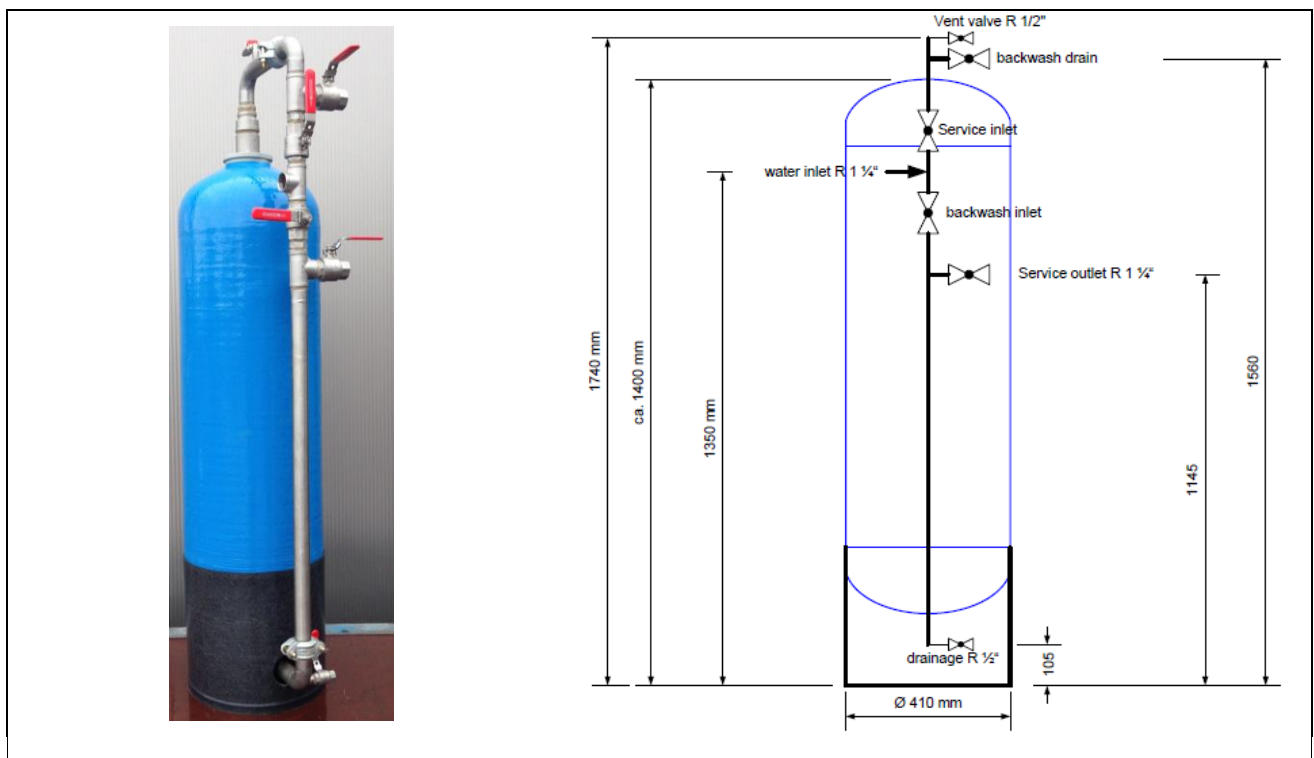

Filter type	Reservoir capacity [liter]	Filtration performance at 50 m/h [m ³ /h]	Connection inlet-outlet; flush connect.	Support grit [kg]	Filter layer [kg]	Press. vessel dia. [mm]	Total height [mm]	Code no.
GFK-Z-16	approx. 125	4	R 1 ¼"	10	165	410	approx. 1740	04.01030.0034



Attention: Differential pressure within the filter max. 0,5 - 0,8 bar.

HAMMELMANN®