

## High pressure hose ID 4 mm

for an operating pressure of max. 1200 bar.  
Connection thread M 8 male one side,  
M 10 x 1 mm male the other side, to clean  
pipes with bends or where rigid lances  
cannot be used.

Hose diameter: 8 mm  
Fitting diameter: 11 mm


Length	Code no.
2000 mm	<b>04.04595.0853</b>
3000 mm	<b>04.04595.0850</b>
4000 mm	<b>04.04595.0854</b>
6000 mm	<b>04.04595.0855</b>
10000 mm	<b>04.04595.0856</b>
15000 mm	<b>04.04595.0857</b>
20000 mm	<b>04.04595.0858</b>
40000 mm	<b>04.04595.0859</b>

## High pressure hose ID 6 mm

for an operating pressure of max. 1100 bar.  
Connection thread M 10 x 1 mm both sides  
to clean pipes with bends or where rigid  
lances cannot be used.

Hose diameter: 12 mm  
Fitting diameter: 15 mm

Length	Code no.
2000 mm	<b>04.04596.0853</b>
3000 mm	<b>04.04596.0850</b>
3500 mm	<b>04.04600.0080</b>
4000 mm	<b>04.04596.0854</b>
6000 mm	<b>04.04596.0855</b>
7000 mm	<b>04.04600.0419</b>
8000 mm	<b>04.04600.0072</b>
10000 mm	<b>04.04596.0856</b>
12000 mm	<b>04.04600.0169</b>
15000 mm	<b>04.04596.0857</b>
20000 mm	<b>04.04596.0858</b>
30000 mm	<b>04.04600.0742</b>
50000 mm	<b>04.04600.0902</b>

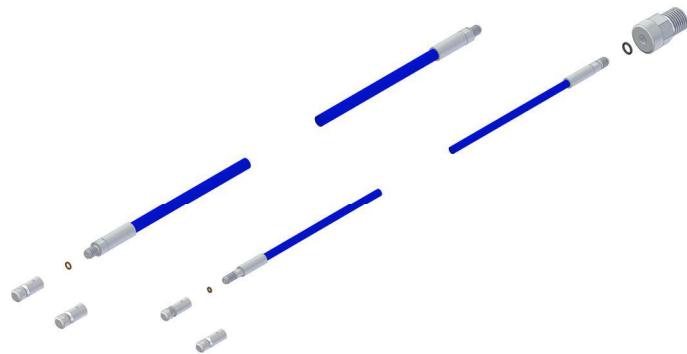

Accessories	Code no.
Socket M 8, 1000 bar, to fit the nozzle	<b>01.02785.0023</b>
Socket ditto, 500 bar 500 mm long	<b>01.03559.0196</b>
Nozzle	<b>upon request</b>
Connecting piece to pistol SP 1000, 1000 bar	<b>01.02795.0038</b>
O-ring	<b>04.00730.0064</b>
Connecting piece to hose ID 12-DKM, 750 bar	<b>01.05300.0182</b>
Hose ID 12-DKO, 1000 bar M 10 x 1	<b>01.05300.0472</b>
M 8	<b>01.05300.0800</b>
O-ring	<b>04.00730.0038</b>

Accessories	Code no.
Socket M 10 x 1, 1000 bar, to fit the nozzle	<b>01.02785.0024</b>
Socket ditto, 1000 bar, 500 mm long	<b>01.03559.0149</b>
Nozzle	<b>upon request</b>
Connecting piece to pistol SP 1000, 1000 bar	<b>01.02795.0038</b>
O ring	<b>04.00730.0064</b>
Connecting piece to hose ID 12-DKM, 750 bar	<b>01.05300.0182</b>
Hose ID 12-DKO, 1000 bar	<b>01.05300.0472</b>
O ring	<b>04.00730.0038</b>

# FLEXIBLE LANCES

- Inner tube: Polyoxymethylene
- Outer cover: Polyamide
- Colour: blue
- Double wire braid reinforcement
- Highly stretch resistant
- With safety connectors
- Temperature range: -10 °C to +70 °C
- Identification marking 0.5 m from connector



Nominal i/d [mm]	Permissible operating pressure [bar]	Nozzle fitting		Minimum bend radius [mm]	Hose length [m]	Weight [kg]	Code no.
		Hose	Connection o/d [mm]				
ID 4	1200	M 8	8	75	2	0.7	04.04595.0823
					3	0.8	04.04595.0820
					4	0.9	04.04595.0824
					6	1.1	04.04595.0825
		10	1.5		04.04595.0826		
		15	2.0		04.04595.0827		
		20	2.5		04.04595.0828		
		40	4.5		04.04595.0829		
ID 6	1100	M 10 x 1	12	110	2	1.0	04.04596.0823
					6	2.0	04.04596.0825
					10	3.1	04.04596.0826
		M 24x1.5 DKO	15		15	4.4	04.04596.0827
					20	5.7	04.04596.0828
					30	8.3	04.04600.1106
					40	10.9	04.04596.0829

**Note:** Burst pressure = 2.5 x permissible operating pressure  
 Test pressure = 1.5 x permissible operating pressure

Other lance length upon request.

Tube cleaning nozzle with sapphire inserts			Code no.
ID 4	Pull nozzle	4 x 0.8	01.00795.0250*
	Clearing/Pull nozzle		09.00514.1106
ID 6	Pull nozzle	3 x 0.8	09.00514.1107
	Clearing/Pull nozzle		09.00514.1105

\* without sapphire insert

There are also suitable nozzles on pages 14.A.1 and 14.A.2

Seal ring	Code no.
ID 4	02.01709.0001
ID 6	02.01709.0002

**HAMMELMANN®**