


HIGH PRESSURE HOSES

12.A.2 – 08/2022

Description:

- Synthetic rubber inner tube.
- 2 steel wire braid reinforcement.
- Wear and weather resistant rubber cover.
- Temperature range:
- 40° to + 100°C

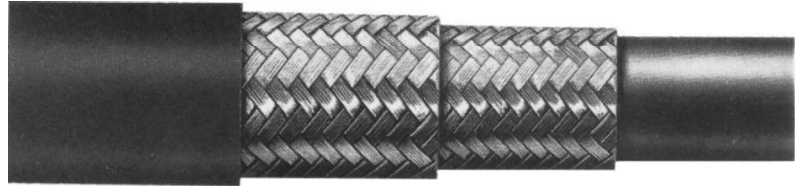

Nominal diameter i/d [mm]	Perm. operating pressure [bar]	Connection	Hose diameter o/d [mm]	Minimal bend radius [mm]	Hose length [m]	Weight [kg]	Code no.
		Spanner A/F Torque					
10	530	M18 x 1.5 DKL	19.0	130	2.0	1.1	04.04598.0313
					4.0	2.3	04.04598.0314
					6.0	3.4	04.04598.0315
		22 mm			10.0	5.7	04.04598.0316
					15.0	8.6	04.04598.0317
					20.0	11.4	04.04598.0318
					40.0	22.8	04.04598.0319
12	440	M22 x 1.5 DKL	22.2	180	2.0	1.3	04.04599.0313
					4.0	2.6	04.04599.0314
					6.0	3.9	04.04599.0315
		27 mm			10.0	6.5	04.04599.0316
					15.0	9.8	04.04599.0317
					20.0	13.0	04.04599.0318
					40.0	26.0	04.04599.0319
20	340	M30 x 1.5 DKM	29.3	240	2.0	1.9	04.04602.0313
					4.0	3.8	04.04602.0314
					6.0	5.6	04.04602.0315
		36 mm			10.0	9.4	04.04602.0316
					15.0	14.1	04.04602.0317
					20.0	18.8	04.04602.0318
					40.0	37.6	04.04602.0319
25	260	M38 x 1.5 DKM	38.1	300	2.0	2.9	04.04603.0313
					4.0	5.9	04.04603.0314
					6.0	8.8	04.04603.0315
		46 mm			10.0	14.7	04.04603.0316
					15.0	22.1	04.04603.0317
					20.0	29.4	04.04603.0318
					40.0	58.8	04.04603.0319
105 Nm							

NOTE!

Burst pressure = 2.5 x permissible operating pressure
 Test pressure = 1.5 x permissible operating pressure

NOTE!

Other hose lengths available upon request.

HAMMELMANN®