
## HAND HELD AQUABLAST®

## HAND HELD AQUABLAST® FRWV 3000

- Ergonomic hand held cleaning and stripping unit.
- Twin trigger operation.
- Aluminium housing with all water bearing parts from stainless steel.
- Brush arrangement ensures that stand off distance is maintained.
- Connection for vacuum system.

## **TYPICAL APPLICATIONS**

- Cleaning, stripping vertical surfaces.
- Ship repair: Removing marine growths, stripping hull coatings above and below the water line.
- Construction industry: Removing paint from facades and other concrete surfaces.
- · Cleaning tanks.

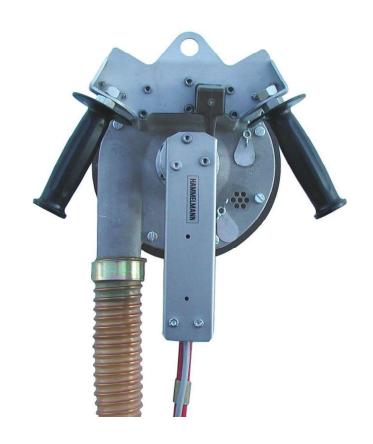

## **TECHNICAL DATA**

Operating pressure max.:	3000 bar
Working width:	140 mm
Flow rate:	20 l/min
Speed of rotation:	3000 min <sup>-1</sup>
Connection thread:	M14 x 1.5 LH

<u>Dimensions:</u>	
Length:	350 mm
Width:	350 mm
Height:	174 mm

Weight:	
<sup>L</sup> Electric control:	approx. 9.2 kg
L Pneumatic control:	approx. 9.4 kg

HAND HELD AQUABLAST®	Code no.
4 pole system	09.00661.0223
with pneumatic control	09.00661.0224

	Accessory	Code no.
Protect	ion for abrasive work	00.04877.0015

Weight:	
<sup>L</sup> Electric control:	approx. 9.2 kg
L Pneumatic control:	approx. 9.4 kg



Nozzle inserts design "P" & "T" - 8 pieces -

