

# VACUUM UNIT - 650

13.K.2 – 11/2019

## HAMMELMANN VACUUM UNIT-650

Stationary waste collection unit with two-chamber system for suction and pre-filtering of evacuated high pressure water.

### Consisting of:

- Stationary waste collection unit with rigid, torsion free frame on shock absorbers.
- Waste water and solids are separated within the system for further disposal.
- The pre-cleaned waste water is pumped out of the unit so that downtime is minimised.
- Separator collects materials in suspension.
- Hinged doors to allow solids removal.
- De-watering pump with over suction protection.
- Sight glasses for monitoring content level.
- High mobility through forklift shoes.

### Technical data

Length:	approx. 2530 mm
Width:	approx. 1520 mm
Height:	approx. 2080 mm
Weight:	approx. 1500 kg


Container volume	
• Pre-separator:	630 l
• Fine separator:	430 l

Vacuum:	240 mbar
Suction volume:	650 m <sup>3</sup> /h

Connections	
• Water out:	G 1 ½"
• Suction in:	5"-Perrot coupling

Centrifugal pump:	04.03226.0769
Vacuum pump:	04.03239.0005

Diesel engine	
• Drive:	3 cylinder HATZ diesel engine
• Engine power:	36,7 kW at 2150 min <sup>-1</sup>
• Fuel tank:	60 l

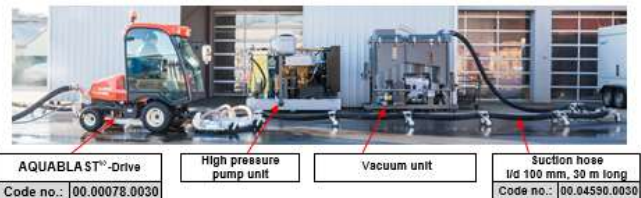

AQUABLAST®-Drive  
Code no.: 00.00078.0030

High pressure  
pump unit

Vacuum unit

Suction hose  
l/d 100 mm, 30 m long  
Code no.: 00.04590.0030

	<b>Code no.</b>
<b>Vacuum unit</b>	<b>00.05480.0009</b>

**HAMMELMANN®**